


Light-Duty Grade 2 Tubular
LT2000 SERIES

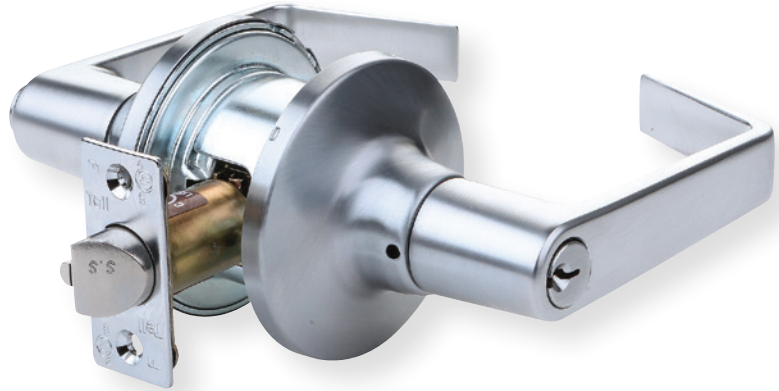

FEATURES

- Performance**
- Complies with ANSI A156.2, Series 4000
 - Grade 2, (400,000 cycles)
 - UL/ULC listed for 3 hour fire door
 - ANSI A117.1 American Disabilities Act (ADA)

- Chassis**
- Tubular
 - Steel - coated with zinc dichromate (corrosion resistance)

- Lever**
- Solid cast non-handed

- Latch**
- 2 3/4" or 2 3/8" Adjustable backset
 - 1" Housing diameter,
 - 1/2" Stainless steel throw
 - 1" x 2 1/4", Square corner faceplate

- Rose**
- 3" diameter

- Strike**
- ASA Strike 1 1/4" x 4 7/8"
 - Optional T-Strike 1 1/8" x 2 3/4"
 - Optional F-Strike (full lip)

- Cylinder**
- C keyway (SCC)
 - 6-pin solid brass
 - Keyed different (KD)

- Keys**
- Two nickel silver per lock cylinder

- Door Thickness**
- 1 3/8" - 2"

- Door Preparation**
- 2 1/8" diameter
 - 1" diameter for latchbolt
 - Fits standard 161 door prep

- Warranty**
- Lifetime limited

LT2000 SERIES

OPTIONS

KEYING 6-pin cylinders, can be pinned to 5-pin.

Cylinders Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Options Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)

Tell Cylinder Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available only keyed to 6-pin.

Keying Options Grand Master Key (GMK), Construction Master Key (CMK), Master Key (MK), Keyed Different (KD), Keyed Alike (KA), Interchangeable Core uncombined (IC), 0-bitted (OBIT)

AVAILABLE FUNCTIONS	Entry 81	Passage 75
	Storeroom 86	Single Dummy 01
	Privacy Bed/Bath 76	

TELL FINISHES



US26D
Satin Chrome



US3
Polished Brass